

# Licensing & Activation of PlugIns or XTensions

---

To activate, register or order a demo version of CoDesCo Software (XTensions, PlugIns, Applications) you need to have an active Internet connection!

The software will be delivered as an Installer. Just start the Installer and choose the desired software and version. All required files - including documentation - will installed automatically.

NOTE: The Installer will try to locate all installed versions of QuarkXPress or InDesign. Please check that the correct paths have been found.


All CoDesCo Software products requires a license in form of a serial number and with the activation (online) the license will be bound to the workstation. Each license (serial number) is a single-user license.

Please contact us if you need multi-user or site licenses.

## Desktop Applications

When you bought a CoDesCo XTension / PlugIn, you received an appropriate serial number. To activate the Software start the Installer, choose the needed Software and Version and install. After successful installation start QuarkXPress or Adobe InDesign. Mac and Windows use different installers, but the procedure is the same on both platforms.

The **licensing dialog** opens:

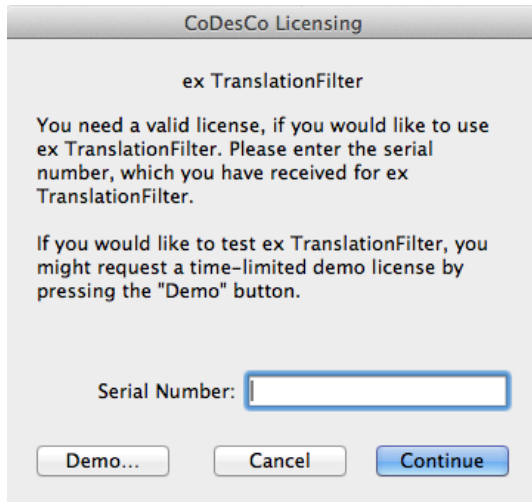


The image shows a dialog box titled "CoDesCo Licensing". Inside, it says "ex TranslationFilter". The main text reads: "You need a valid license, if you would like to use ex TranslationFilter. Please enter the serial number, which you have received for ex TranslationFilter." Below this, it says: "If you would like to test ex TranslationFilter, you might request a time-limited demo license by pressing the 'Demo' button." There is a text input field labeled "Serial Number:". At the bottom, there are three buttons: "Demo...", "Cancel", and "Continue".

Type in the delivered serial number for your XTension / PlugIn and click **Continue**.

This will open the **registration dialog** – to either activate and register your license or order a demo version.

**We strongly recommend to register. Only registered licenses are eligible for support.**

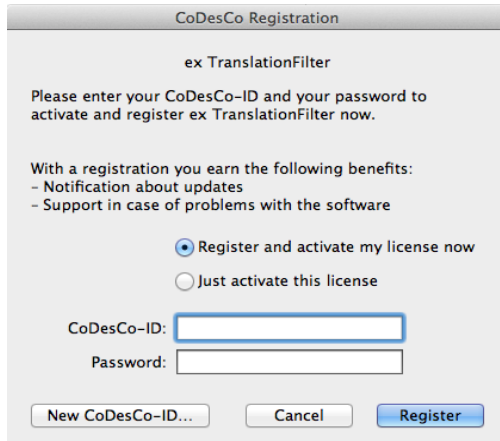

The image shows a dialog box titled "CoDesCo Registration". Inside, it says "ex TranslationFilter". The main text reads: "Please enter your CoDesCo-ID and your password to activate and register ex TranslationFilter now." Below this, it says: "With a registration you earn the following benefits:" followed by a list: "- Notification about updates" and "- Support in case of problems with the software". There are two radio buttons: "Register and activate my license now" (which is selected) and "Just activate this license". Below the radio buttons, there are two text input fields: "CoDesCo-ID:" and "Password:". At the bottom, there are three buttons: "New CoDesCo-ID...", "Cancel", and "Register".

CoDesCo Product Licensing

CoDesCo - License Administration Client (CLAC)

**Create User Profile**

**User**

CoDesCo ID (self chosen username) \*:

Password \*:

Password again \*:

**Contact**

Gender \*:  
 male  female  don't know

Firstname:

Middle name (initial):

Lastname \*:

Telephone:

Personal contact email \*:

Language:  
 English

**Company**

Name \*:

Street \*:

Country \*:

Zipcode \*:

City \*:

Bitte geben Sie hier die Zeichen ein, die im Bild angezeigt werden: \*:

**Create profile**

Privacy  
 We ensure that the needed data for creating and changing your user profile will be exclusively used for our CoDesCo License Administration (CLAC) services. No data will be shared with third parties.

To **Register and Activate** your Software type in your **CoDesCo-ID** and your **Password**. The CoDesCo-ID is - similar to the Adobe-ID - your account for all CoDesCo products. Your profile allows for an easy overview of all registered licenses.


**NOTE: The CoDesCo website and the license management pages are entirely separate for technical and security reasons. The CoDesCo ID is only used for product registration and activation and has no relation to the login used for codesco.com**

If you current have no CoDesCo ID, just click **New CoDesCo-ID...**, to create an ID with a password. For this you will be redirected to the registration server where you can type in your data. **Your data will only be used for registration of your licenses and will never be shared with any 3rd parties!**


Confirm your entries with a click on **Create Profile**. Go back to QuarkXPress / InDesign

and type in your Username and Password and click **Register**.

The software will connect to the internet and activate your license. A corresponding message will appear:

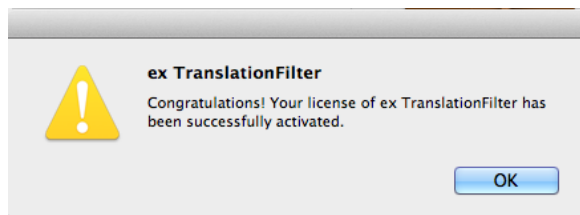

**Note:** If your system is configured to use a proxy, a second dialog will prompt for your proxy login credentials:

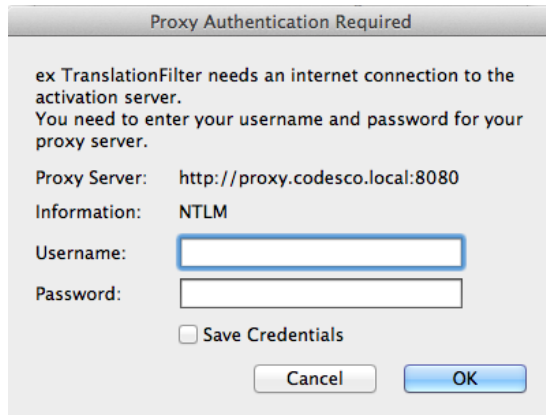

**If you cancel here, your license cannot be activated!**

## Deactivate a license

Licenses bound to a workstation or server must be deactivated before they can be activated on a different machine.

To deactivate, open the license menu. In **InDesign**, you will find the option under the **Help** menu. In **QuarkXPress** the menu can be found under **File** (Win) or **QuarkXPress** (Mac).

A click on **Deactivate** will free the license for use on a different machine.

## Request a demo version

If you want to test a demo version first, proceed like describe above - but choose "Request a demo" in the dialog.

**Note: A vemo version must be registeted to your name and will be activated for you. The demo version is time limited. A demo version can be requested only once.**

To request a demo version type in your CoDesCo ID and your password. If you have no CoDesCo-ID, click **New CoDesCo ID...** and type in your data. Then switch back to your main application and type in your CoDesCo-ID and your password and click **Request**.

Choose **ex XTension edit license** to see on which name the demo is activated. On this machine you can deactivate and later activate again this demo, but this will not extend the trial period. The demo cannot be activated again on another machine.

## License File

Activating a license on your machine (full version or demo) will create a license file. All CoDesCo license files are saved in the following path:

**Mac:** <Mac HD>/Library/Application Support/CoDesCo/licenses


**Windows:** %PROGRAMDATA%\CoDesCo\licenses

**Tampering with the CoDesCo license files will damage and invalidate the license! Recreating a license that was lost due to tampering may incur an additional charges!**

## Common problems and solutions

### Wrong serial number

When you type in a serial number for activation and get the following message:

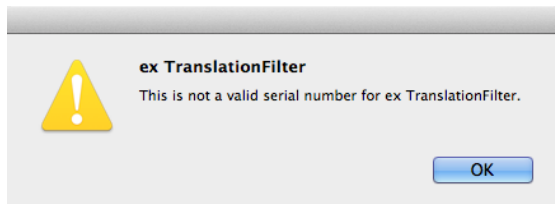


Please check that the entered serial number has been entered correctly. The serial number consist of 4 x 4 digits plus a 2-digit number.

Example: xxxx xxxx xxxx xxxx xx (space delimited)

Maybe the serial number was delivered for a wrong product, a wrong version or for wrong platform? In this case please check the delivery note for product (XPress or InDesign), version and platform. If it's not clear, please contact us via eMail: [verkauf@codesco.com](mailto:verkauf@codesco.com).

## Activation server is not available

If you try to activate a license or request a demo and the following message appears:

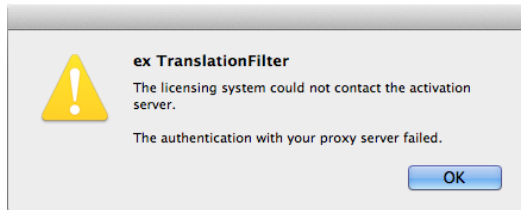


In this case please check your Internet connection and your Proxy login. For activation an active Internet connection is needed.

## The maximum number of licenses is already installed on other machines

Each license supports a limited number of concurrent activations. If you are trying to move the license from one workstation to another, make sure you deactivate the license first.

## License is damaged

While starting Quark XPress / Adobe InDesign you get the message that the license is damaged:

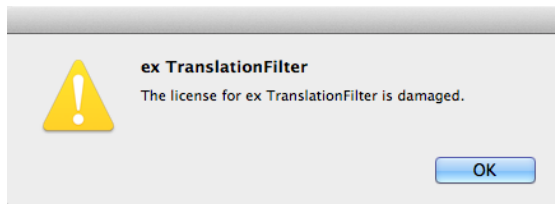

This message appears when the license file has been tampered with. In this case please contact us via eMail [verkauf@codesco.com](mailto:verkauf@codesco.com).

**Recreating a license that was lost due to tampering may incur an additional charges!**

## Server Applications

The license activation process for InDesign Server and QuarkXPress Server works differently due to a lack of a GUI. The following guide shows activating a PlugIn in Indesign Server. The process is the same on QuarkXPress Server.


The server application should be run as a foreground application instead of a service so status messages can be seen.

After running the Installer (or after manual installation) the following hint will appear while first start of the Server console:

```

C:\Windows\system32\cmd.exe
C:\Users\woodwing\Desktop>ren Start ID-Server mit Port
C:\Users\woodwing\Desktop>cd "C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64"
C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64>InDesignServer.com -port 18383
-----
. InDesign CS6 Server-Version 8.0.2 x64 - Developer Edition
. Copyright 1999-2012 Adobe Systems Incorporated and its licensors.
. All rights reserved. See the other legal notices in the ReadMe.
-----
12/28/14 14:11:33 INFO [Server] Initialisierung
12/28/14 14:11:33 INFO [Server] Anwendung wird geladen
12/28/14 14:11:33 INFO [Server] Zusatzmodule werden gesucht
12/28/14 14:11:33 INFO [Server] 126 Zusatzmodule werden registriert
12/28/14 14:11:46 INFO [Server] Objektmodell wird fertig gestellt
12/28/14 14:11:46 INFO [Server] Objektmodell wird gespeichert
12/28/14 14:11:46 INFO [Server] Zusatzmodule werden initialisiert
log4cplus:ERROR Failed to create locale DEFAULT
log4cplus:ERROR Failed to create locale DEFAULT
12/28/14 14:11:46 INFO [Server] "Early Initializers" werden aufgerufen
12/28/14 14:11:50 INFO [Server] Dienstregistrierung wird gestartet
12/28/14 14:12:03 INFO [Server] Startdienste werden ausgefuehrt
12/28/14 14:12:03 FEHLER [Server] Sie benoetigen eine gultige Lizenz fuer TranslationFilter.
Bitte legen Sie eine Datei mit den Lizenzdaten neben das Plug-in in den Ordner Plug-Ins.
12/28/14 14:12:03 INFO [Server] Konfiguration "configuration_18383" wird verwendet.
12/28/14 14:12:05 INFO [Server] Anwendung wird initialisiert
12/28/14 14:12:06 INFO [Server] Initialisierung wird abgeschlossen
12/28/14 14:12:06 INFO [Server] "Late Initializers" werden aufgerufen
12/28/14 14:12:14 INFO [Server] Bilduebersichten sind deaktiviert
12/28/14 14:12:14 INFO [Server] Server wird ausgefuehrt
12/28/14 14:12:14 INFO [javascript] Datei ausgefuehrt: C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64\Scripts\
startup scripts\ConnectInstancesToESTK.js
12/28/14 14:12:14 INFO [javascript] Datei ausgefuehrt: C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64\Scripts\
converturltohyperlink\startup scripts\ConvertURLToHyperlinkMenuItemsLoader.jsx
12/28/14 14:12:14 INFO [javascript] Datei ausgefuehrt: C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64\Scripts\
converturltohyperlink\ConvertURLToHyperlinkMenuItems.jsxbin
12/28/14 14:12:15 INFO [soap] SOAP-Anforderungen werden an Anschluss 18383 abgewickelt.
  
```


**Note:** If you installed the InDesign Server on Mac, start the Server with the script "InDesignServer.command" in Adobe InDesign Server CC2014 application folder:

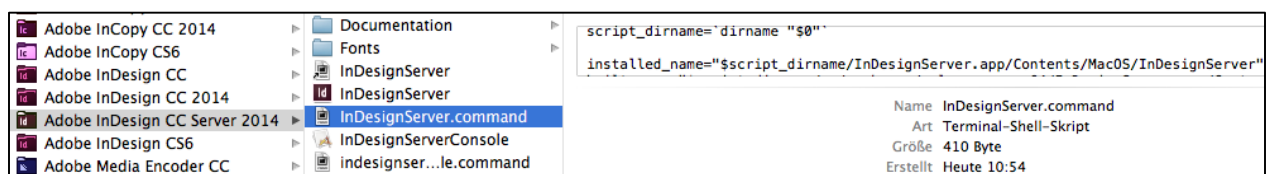

You have received a license file with the delivery of the XTension or PlugIn. It is named as follows:

<serialnumber>-license.properties  
for example: 228000010015-license.properties

Copy this license file directly beside the PlugIn.

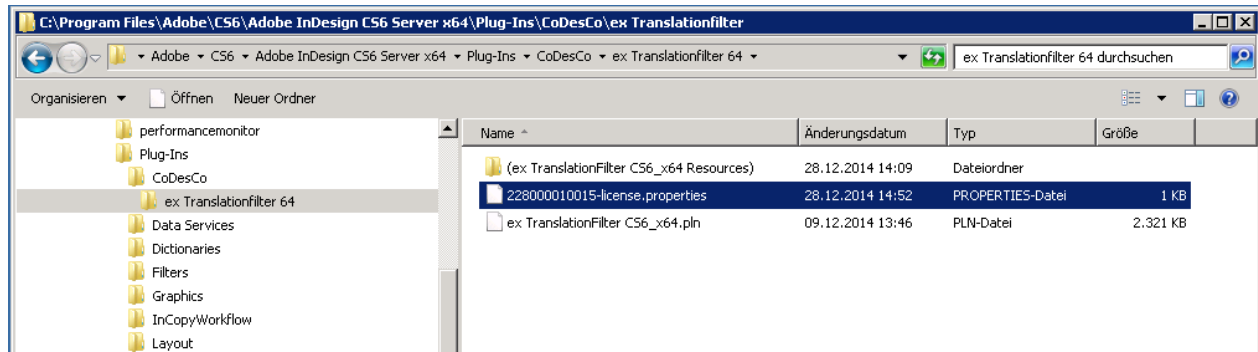

The license file can be edited with a text editor to enable either online activation or offline activation by mail:

```

; This file contains your license data required to activate a CoDesCo product
; without user interface. Please put it next to the product to be activated.
; If you want to use the offline activation, there is nothing else to do.
; Please follow the instructions issued by the product.
; If you want to use the online activation, please change the Method to
; "Online", remove the comment marks before CoDesCoID and CLACPassword and set
; their values.
; You need to restart the application to trigger the next step in the
; activation process.
;
; Method: "Mail" or "Online".
; "Mail" requires only SerialNumber.
; "Online" requires SerialNumber, CoDesCoID and CLACPassword.
Method=Mail
SerialNumber=218000012015000761
; CoDesCoID=email@example.com
; CLACPassword=Your CoDesCoID password
;
; If you are using a proxy server, which requires a user name and password for
; internet access, please uncomment the next two lines and set their values.
; ProxyUser=Proxy username
; ProxyPassword=Proxy password

```

Predefined is offline method per eMail (in example above).



If you have an Internet connection, you can activate online activation by filling in your login information:

```
; This file contains your license data required to activate a CoDesCo product
; without user interface. Please put it next to the product to be activated.
; If you want to use the offline activation, there is nothing else to do.
; Please follow the instructions issued by the product.
; If you want to use the online activation, please change the Method to
; "Online", remove the comment marks before CoDesCoID and CLACPassword and set
; their values.
; You need to restart the application to trigger the next step in the
; activation process.
;
; Method: "Mail" or "Online".
; "Mail" requires only SerialNumber.
; "Online" requires SerialNumber, CoDesCoID and CLACPassword.
Method=Online
SerialNumber=218000012015000761
CoDesCoID=email@example.com
CLACPassword=Your CoDesCoID password
;
; If you are using a proxy server, which requires a user name and password for
; internet access, please uncomment the next two lines and set their values.
; ProxyUser=Proxy username
; ProxyPassword=Proxy password
```

A CoDesCo ID can be created here:

<http://clac.codesco.com/clac/>

Here you can define your eMail adress as **your CoDesCo-ID** and choose a **password** – you need to enter both instead of the placeholders in the license file, to enable the link between the license and your registration data.


If you are using a Proxy for authentication in your network, you have to enter that login data also in the license file. Otherwise a communication with the CoDesCo License Server is not possible.

While starting the InDesign-Server the PlugIn looks for the license file and starts the activation process.

If the activation fails, first check your network access by opening the registration site (<http://clac.codesco.com/clac/>) – if this works the activation should also work. If there are any problems at this point, please contact your systems administrator or choose the Offline-activation.

## Online activation

Quit the InDesign-Server and restart again with the license file. At “online“-activation the following message appears now:

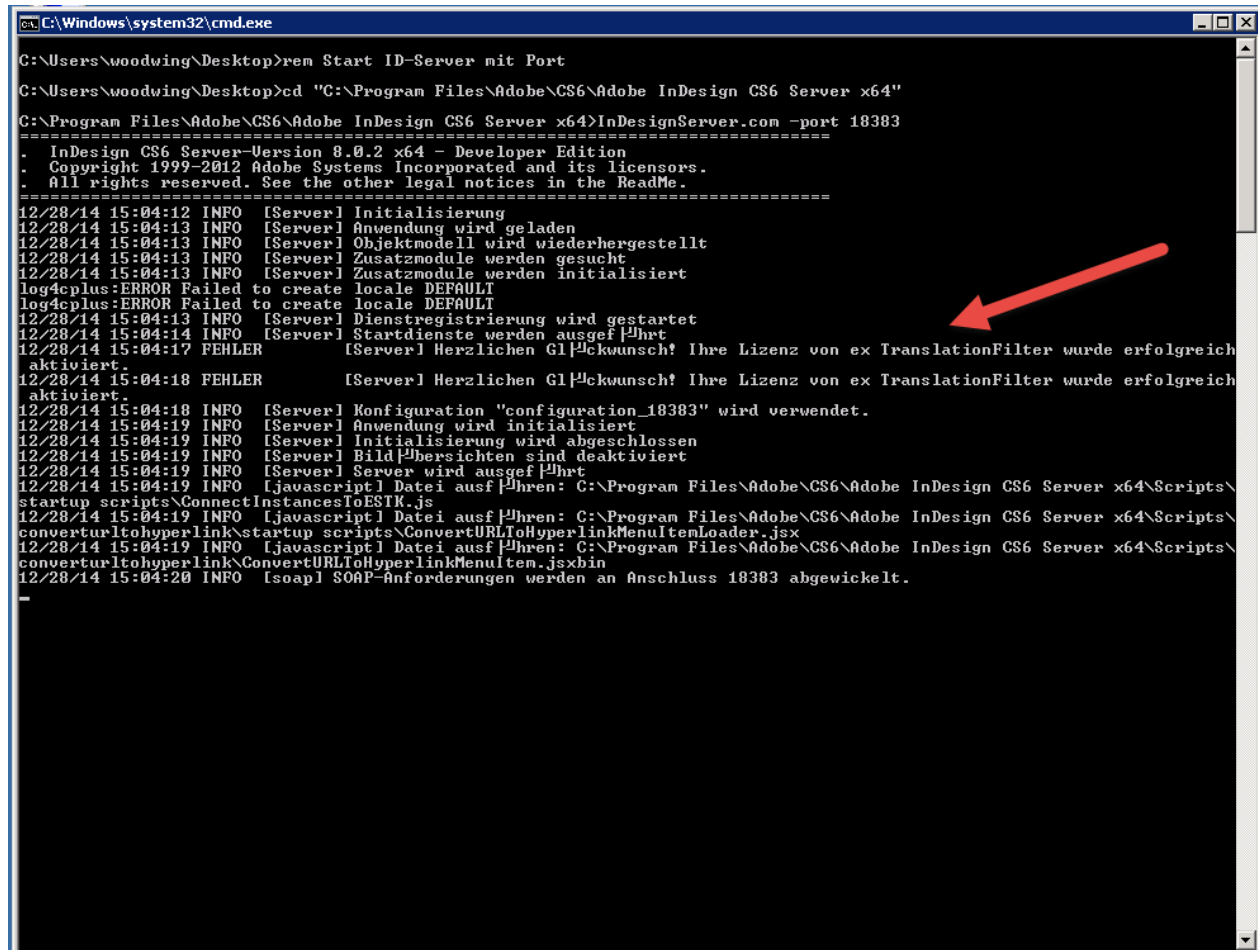

```
C:\Windows\system32\cmd.exe
C:\Users\woodwing\Desktop>rem Start ID-Server mit Port
C:\Users\woodwing\Desktop>cd "C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64"
C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64>InDesignServer.com -port 18383
=====
. InDesign CS6 Server-Version 8.0.2 x64 - Developer Edition
. Copyright 1999-2012 Adobe Systems Incorporated and its licensors.
. All rights reserved. See the other legal notices in the ReadMe.
=====
12/28/14 15:04:12 INFO [Server] Initialisierung
12/28/14 15:04:13 INFO [Server] Anwendung wird geladen
12/28/14 15:04:13 INFO [Server] Objektmodell wird wiederhergestellt
12/28/14 15:04:13 INFO [Server] Zusatzmodule werden gesucht
12/28/14 15:04:13 INFO [Server] Zusatzmodule werden initialisiert
log4cplus:ERROR Failed to create locale DEFAULT
log4cplus:ERROR Failed to create locale DEFAULT
12/28/14 15:04:13 INFO [Server] Dienstregistrierung wird gestartet
12/28/14 15:04:14 INFO [Server] Startdienste werden ausgef#uhrt
12/28/14 15:04:17 FEHLER [Server] Herzlichen Gl#ckwunsch! Ihre Lizenz von ex TranslationFilter wurde erfolgreich
aktiviert.
12/28/14 15:04:18 FEHLER [Server] Herzlichen Gl#ckwunsch! Ihre Lizenz von ex TranslationFilter wurde erfolgreich
aktiviert.
12/28/14 15:04:18 INFO [Server] Konfiguration "configuration_18383" wird verwendet.
12/28/14 15:04:19 INFO [Server] Anwendung wird initialisiert
12/28/14 15:04:19 INFO [Server] Initialisierung wird abgeschlossen
12/28/14 15:04:19 INFO [Server] Bild#bersichten sind deaktiviert
12/28/14 15:04:19 INFO [Server] Server wird ausgef#uhrt
12/28/14 15:04:19 INFO [javascript] Datei ausgef#uhren: C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64\Scripts\
startup scripts\ConnectInstancesToESTK.js
12/28/14 15:04:19 INFO [javascript] Datei ausgef#uhren: C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64\Scripts\
converturltohyperlink\startup scripts\ConvertURLToHyperlinkMenuItemLoader.jsx
12/28/14 15:04:19 INFO [javascript] Datei ausgef#uhren: C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64\Scripts\
converturltohyperlink\ConvertURLToHyperlinkMenuItem.jsxbin
12/28/14 15:04:20 INFO [soap] SOAP-Anforderungen werden an Anschluss 18383 abgewickelt.
-
```

**Note:** The console on Windows has problems displaying umlauts. It only affects displayed text on the console and does not affect operation. The issue does not appear on english versions of InDesign Server.

You will be informed if the activation procedure was successful.


Congratulations! – The license is now activated and bound to this machine and InDesign-Server.

You need a license for each instance and server installation.

## Offline activation

If your InDesign-Server is running on a machine without an internet connection, the license can be activate offline via Email.


The PlugIn will generate a request file on first start:

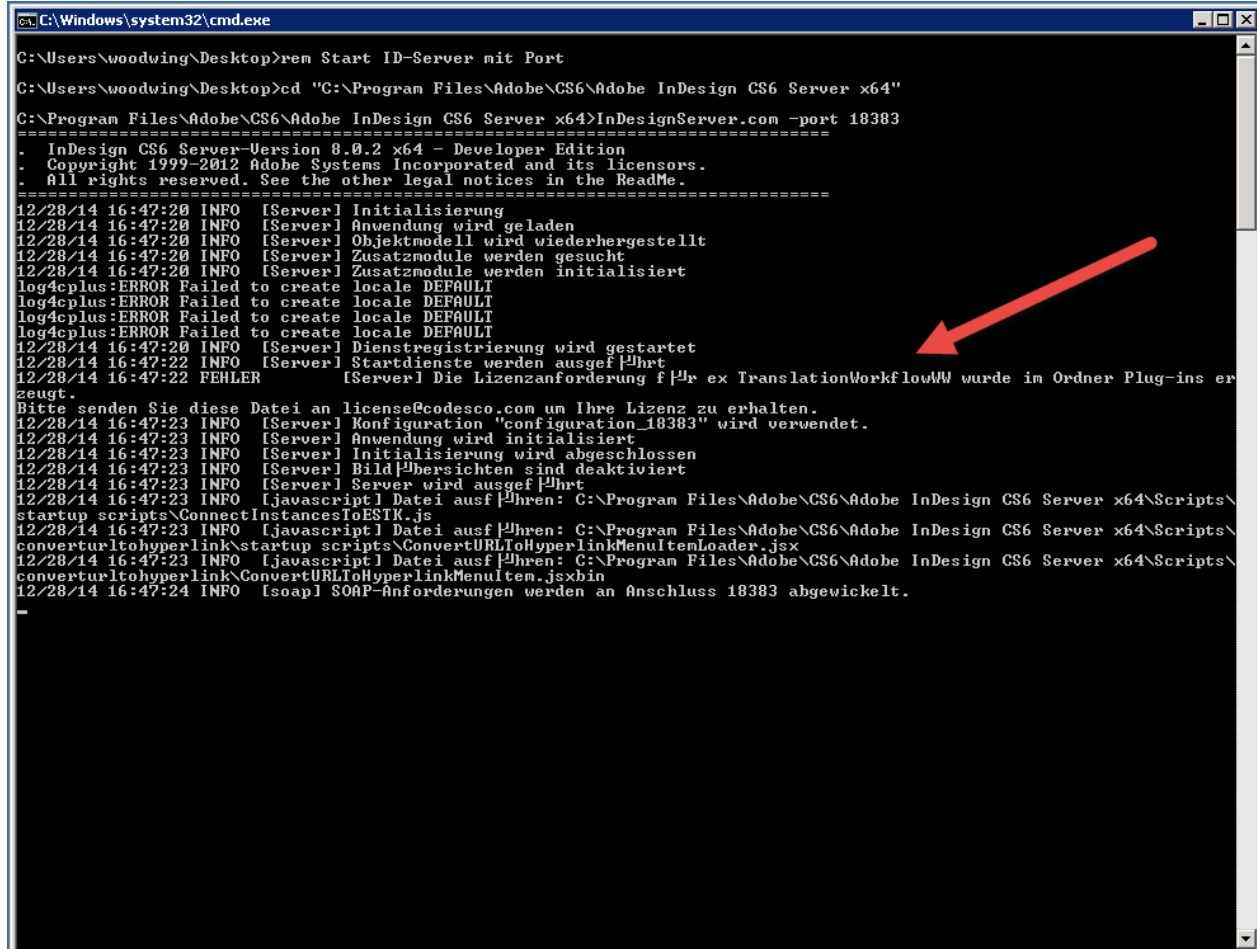

```

C:\Windows\system32\cmd.exe
C:\Users\woodwing\Desktop>rem Start ID-Server mit Port
C:\Users\woodwing\Desktop>cd "C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64"
C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64>InDesignServer.com -port 18383
=====
. InDesign CS6 Server-Version 8.0.2 x64 - Developer Edition
. Copyright 1999-2012 Adobe Systems Incorporated and its licensors.
. All rights reserved. See the other legal notices in the ReadMe.
=====
12/28/14 16:47:20 INFO [Server] Initialisierung
12/28/14 16:47:20 INFO [Server] Anwendung wird geladen
12/28/14 16:47:20 INFO [Server] Objektmodell wird wiederhergestellt
12/28/14 16:47:20 INFO [Server] Zusatzmodule werden gesucht
12/28/14 16:47:20 INFO [Server] Zusatzmodule werden initialisiert
log4cplus:ERROR Failed to create locale DEFAULT
log4cplus:ERROR Failed to create locale DEFAULT
log4cplus:ERROR Failed to create locale DEFAULT
log4cplus:ERROR Failed to create locale DEFAULT
12/28/14 16:47:20 INFO [Server] Dienstregistrierung wird gestartet
12/28/14 16:47:22 INFO [Server] Startdienste werden ausgef|uhrt
12/28/14 16:47:22 FEHLER [Server] Die Lizenzanforderung für ex TranslationWorkflowWW wurde im Ordner Plug-ins er-
zeugt.
Bitte senden Sie diese Datei an license@codesco.com um Ihre Lizenz zu erhalten.
12/28/14 16:47:23 INFO [Server] Konfiguration "configuration_18383" wird verwendet.
12/28/14 16:47:23 INFO [Server] Anwendung wird initialisiert
12/28/14 16:47:23 INFO [Server] Initialisierung wird abgeschlossen
12/28/14 16:47:23 INFO [Server] Bild|bersichten sind deaktiviert
12/28/14 16:47:23 INFO [Server] Server wird ausgef|uhrt
12/28/14 16:47:23 INFO [javascript] Datei ausf|uhren: C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64\Scripts\
startup scripts\ConnectInstancesToESTK.js
12/28/14 16:47:23 INFO [javascript] Datei ausf|uhren: C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64\Scripts\
converturltohyperlink\startup scripts\ConvertURLToHyperlinkMenuItemLoader.jsx
12/28/14 16:47:23 INFO [javascript] Datei ausf|uhren: C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64\Scripts\
converturltohyperlink\ConvertURLToHyperlinkMenuItem.jsx
12/28/14 16:47:24 INFO [soap] SOAP-Anforderungen werden an Anschluss 18383 abgewickelt.
-
  
```

Now you will find a „Request-File“ in the PlugIn directory – name conversion: <license number>-request.xml (example: „21800010015-request.xml“):

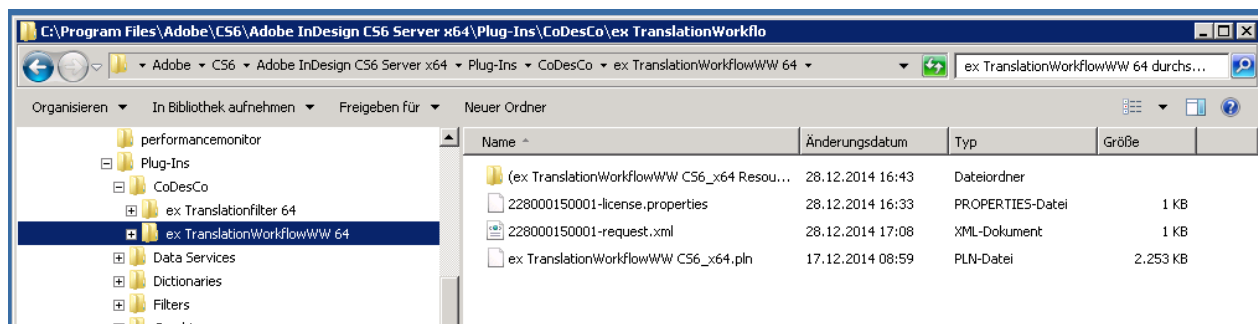


**Note:** If this file was not created, probably you have no writing permission in that directory. Please check and correct your permissions.

Shut down the InDesign Server and send the request file to [license@codesco.com](mailto:license@codesco.com). The license department at CoDesCo will then send you an eMail with an activation file like:

<License number>- activation.xml (example: „21800010015-activation.xml“)

Copy this activation file into the licens folder :

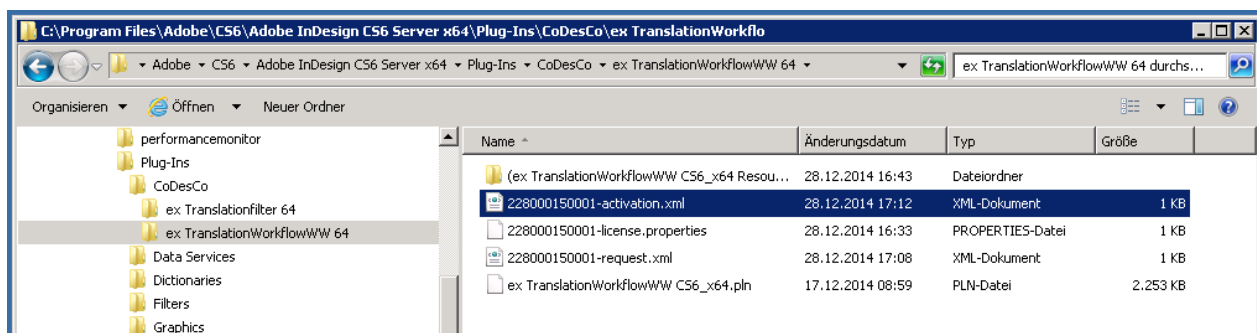


Start your InDesign Server again. The license file will be activated.

```
C:\Windows\system32\cmd.exe
C:\Users\woodwing\Desktop>rem Start ID-Server mit Port
C:\Users\woodwing\Desktop>cd "C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64"
C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64>InDesignServer.com -port 18383
=====
. InDesign CS6 Server-Version 8.0.2 x64 - Developer Edition
. Copyright 1999-2012 Adobe Systems Incorporated and its licensors.
. All rights reserved. See the other legal notices in the ReadMe.
=====
12/28/14 17:14:01 INFO [Server] Initialisierung
12/28/14 17:14:01 INFO [Server] Anwendung wird geladen
12/28/14 17:14:01 INFO [Server] Objektmodell wird wiederhergestellt
12/28/14 17:14:01 INFO [Server] Zusatzmodule werden gesucht
12/28/14 17:14:01 INFO [Server] Zusatzmodule werden initialisiert
log4cplus:ERROR Failed to create locale DEFAULT
log4cplus:ERROR Failed to create locale DEFAULT
log4cplus:ERROR Failed to create locale DEFAULT
log4cplus:ERROR Failed to create locale DEFAULT
12/28/14 17:14:01 INFO [Server] Dienstregistrierung wird gestartet
12/28/14 17:14:03 INFO [Server] Startdienste werden ausgefuehrt
12/28/14 17:14:03 FEHLER [Server] Herzlichen Glueckwunsch! Ihre Lizenz von ex TranslationWorkflowWW wurde erfolgrei
eich aktiviert.
12/28/14 17:14:04 FEHLER [Server] Herzlichen Glueckwunsch! Ihre Lizenz von ex TranslationWorkflowWW wurde erfolgrei
eich aktiviert.
12/28/14 17:14:05 INFO [Server] Konfiguration "configuration_18383" wird verwendet.
12/28/14 17:14:05 INFO [Server] Anwendung wird initialisiert
12/28/14 17:14:05 INFO [Server] Initialisierung wird abgeschlossen
12/28/14 17:14:05 INFO [Server] Bilduebersichten sind deaktiviert
12/28/14 17:14:05 INFO [Server] Server wird ausgefuehrt
12/28/14 17:14:05 INFO [javascript] Datei ausgefuehrt: C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64\Scripts\
startup_scripts\ConnectInstancesToESTK.js
12/28/14 17:14:05 INFO [javascript] Datei ausgefuehrt: C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64\Scripts\
converturltohyperlink\startup_scripts\ConvertURLToHyperlinkMenuItemLoader.jsx
12/28/14 17:14:05 INFO [javascript] Datei ausgefuehrt: C:\Program Files\Adobe\CS6\Adobe InDesign CS6 Server x64\Scripts\
converturltohyperlink\ConvertURLToHyperlinkMenuItem.jsx
12/28/14 17:14:06 INFO [soap] SOAP-Anforderungen werden an Anschluss 18383 abgewickelt.
```

The request and activation files are only valid on the machines they were generated on.

After successful activation you can delete these files or leave them. They are ignored by the PlugIn once activated.

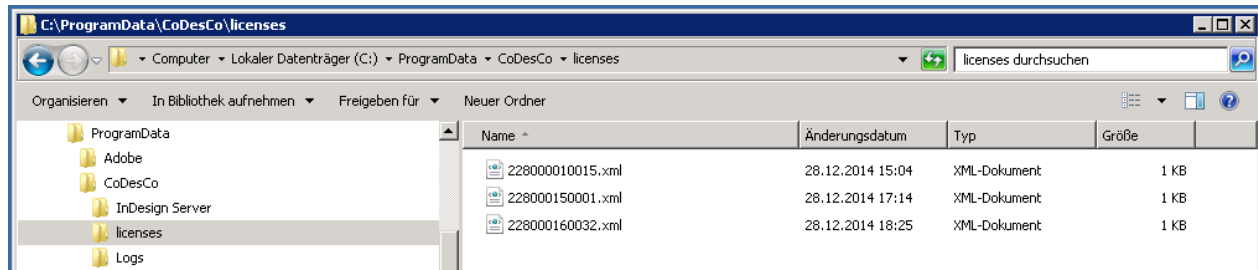

**Tampering with the CoDesCo license files will damage and invalidate the license! Recreating a license that was lost due to tampering may incur an additional charges!**

**Note:** Offline activation is a manual process. Please allow one working day for CoDesCo-License department to generate the activation file.

Deactivation of the Server-PlugIn can only be done by CoDesCo – after this the PlugIn can activated again on another machine.

## Appendix A

All software uses the following directories, exemplary for ex TranslationFilter:

### License file:

**Mac:** <Mac HD>/Library/Application Support/CoDesCo/licenses

**Windows:** %PROGRAMDATA%\CoDesCo\licenses

### Preferences:

PlugIns and XTensions running on desktop applications (e.g. InDesign CC 2014, QuarkXPress 10) store settings on a per-user basis. PlugIns and XTensions running on server software (e.g. InDesign Server, QuarkXPress Server) store settings in a system-wide location.

#### Mac:

**QuarkXPress:** ~/Library/Preferences/CoDesCo/QuarkXPress/exTranslationFilter/

**InDesign:** ~/ Library/Preferences/CoDesCo/InDesign/exTranslationFilter/

**QuarkXPress Server:** /Library/Preferences/CoDesCo/QuarkXPress Server/exTranslationFilter

**InDesign Server:** / Library/Preferences/CoDesCo/InDesign Server/exTranslationFilter

#### Win:

**QuarkXPress:** %APPDATA%\CoDesCo\QuarkXPress\ex TranslationFilter\

**InDesign:** %APPDATA%\CoDesCo\InDesign\ex TranslationFilter\

**QuarkXPress Server:** %PROGRAMDATA%\CoDesCo\QuarkXPress Server\ex TranslationFilter\

**InDesign Server:** %PROGRAMDATA%\CoDesCo\InDesign Server\ex TranslationFilter\

### Documentation:

#### Mac:

**QuarkXPress:** <QuarkXPress>/Documentation/CoDesCo/ex TranslationFilter/

**InDesign:** <InDesign>/Documentation/CoDesCo/ex TranslationFilter/

#### Win:

**QuarkXPress:** %PROGRAMDATA%\CoDesCo\QuarkXPress\ex TranslationFilter\

**InDesign:** %PROGRAMDATA%\CoDesCo\InDesign\ex TranslationFilter\

### Log files:

#### Mac:

~/ Library/Logs/CoDesCo/

#### Win:

InDesign/QuarkXPress Server: %PROGRAMDATA%\CoDesCo\Logs\

InDesign/QuarkXPress Desktop: %APPDATA%\CoDesCo\Logs\