

Preferences ASCII

ex DataLookUp can procure data from an ASCII-file. In the Preferences you can choose this file.



The dialog box is titled "ex DataLookUp - Preferences". It has a "Configuration File" field with the value "ex-Test:ex DataLookUp:SB:ex DataLookUp MDV.xml" and a "Browse..." button. Below this are three dropdown menus: "QPS-Server:" with "MDV", "Publication:" with "Alsfelder Allgemeine", and "Configuration:" with "MDV-Autoren". There are three small icons to the right of the "Configuration:" dropdown. Below these are two tabs: "Setup" (selected) and "Settings". The "Configuration" section contains a "Type:" dropdown set to "ASCII", a "Disable configuration" checkbox, a "Name:" text field with "MDV-Autoren", and a "Description:" text area. The "General" section contains two checkboxes: "Case sensitive" and "Multi value", both unchecked. Below these are two text fields: "Field separator:" with a comma (,) and "Record separator:" with a semicolon (;). At the bottom are "About", "Cancel", and "OK" buttons.

Configuration File: ex-Test:ex DataLookUp:SB:ex DataLookUp MDV.xml [Browse...](#)

QPS-Server: MDV Publication: Alsfelder Allgemeine Configuration: MDV-Autoren

[Setup](#) [Settings](#)

Configuration

Type: ASCII ☐ Disable configuration

Name: MDV-Autoren

Description:

General


☐ Case sensitive

☐ Multi value

Field separator: ,

Record separator: ;

[About](#) [Cancel](#) [OK](#)

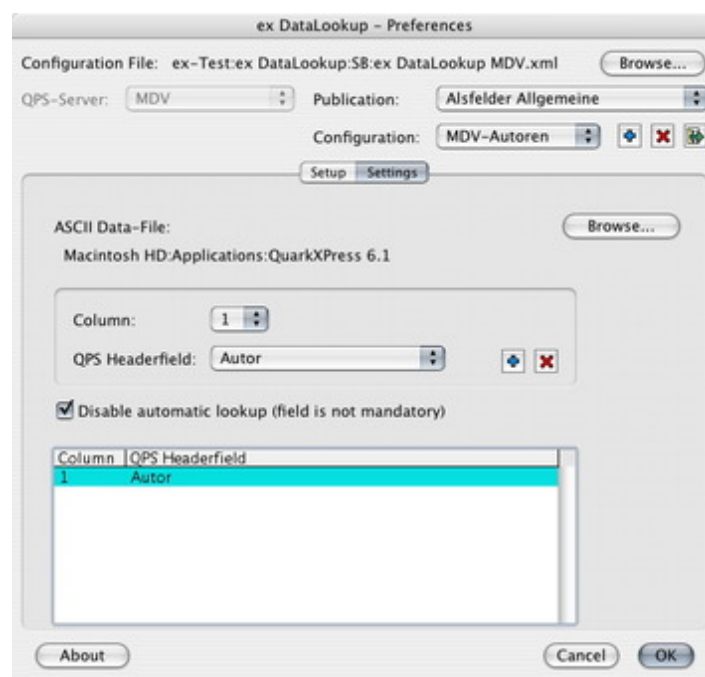

The dialog box is titled "ex DataLookUp - Preferences". It has the same top section as the first image. The "Setup" tab is selected, and the "Settings" tab is also visible. The "ASCII Data-File:" section has a "Browse..." button and a text field with the value "Macintosh HD:Applications:QuarkXPress 6.1". Below this is a "Column:" dropdown set to "1" and a "QPS Headerfield:" dropdown set to "Autor". There are three small icons to the right of the "QPS Headerfield:" dropdown. Below these is a checkbox labeled "Disable automatic lookup (field is not mandatory)" which is checked. At the bottom is a table with two columns: "Column" and "QPS Headerfield". The table has one row with the values "1" and "Autor". At the bottom are "About", "Cancel", and "OK" buttons.

Configuration File: ex-Test:ex DataLookUp:SB:ex DataLookUp MDV.xml [Browse...](#)

QPS-Server: MDV Publication: Alsfelder Allgemeine Configuration: MDV-Autoren

[Setup](#) [Settings](#)

ASCII Data-File: [Browse...](#)

Macintosh HD:Applications:QuarkXPress 6.1

Column: 1 QPS Headerfield: Autor

☒ Disable automatic lookup (field is not mandatory)

Column	QPS Headerfield
1	Autor

[About](#) [Cancel](#) [OK](#)